

EUFOR INTER


Technische Parameter im Wst. 1.4301 und 1.4571



EUFOR INTER

S.P.R.L. EUFOR INTER B.V.B.A.
Eupen - Liège - Antwerpen
Head offices
Am Hertogenwald, 7
B-4700 Eupen
Belgium
Tél. +(32) 87-63.23.00
Fax +(32) 87-63.23.01

Baugröße	DN	40	50	65	80	100	125	150	175	200	250
Außendurchm. der Muffe	[mm]	69	85	102	115	139	165	198	222	249	310
Außendurchm. des Rohres	[mm]	48,3	60,3	76,1	88,9	114,3	139,7	168,3	193,7	219,1	273
Wandstärke des Rohres	[mm]	2,0	2,0	2,0	2,6	2,9	2,9	3,2	3,6	4,0	5,0
Dichtringabmessung	[mm]	48 x 4	60 x 5	77 x 5	88 x 5	110 x 5	136 x 5	166 x 5	190 x 6	215 x 6	270 x 6
Scherstab	$D_s \times s$ [mm]	5 x 1,25	7 x 1,5					9 x 1,8		11 x 2,2	
Zugfederstrang	L [mm]	150	190	265	280	350	445	535	610	690	870
Masse/Rohr	[kg/m]	2,31	2,92	3,70	5,61	8,12	9,97	13,20	17,14	21,50	33,50
Masse/Verbindersatz	[kg/Satz]	1,10	1,80	2,20	3,20	4,00	5,20	6,90	8,20	9,60	18,90
Volumen des Innenraumes	[l/m]	1,4	2,5	4,1	5,5	9,3	14,1	20,6	27,2	34,9	54,3
zuläs. Zugbeanspruchung	[kN]	40	50	65	80	100	125	150	175	200	250

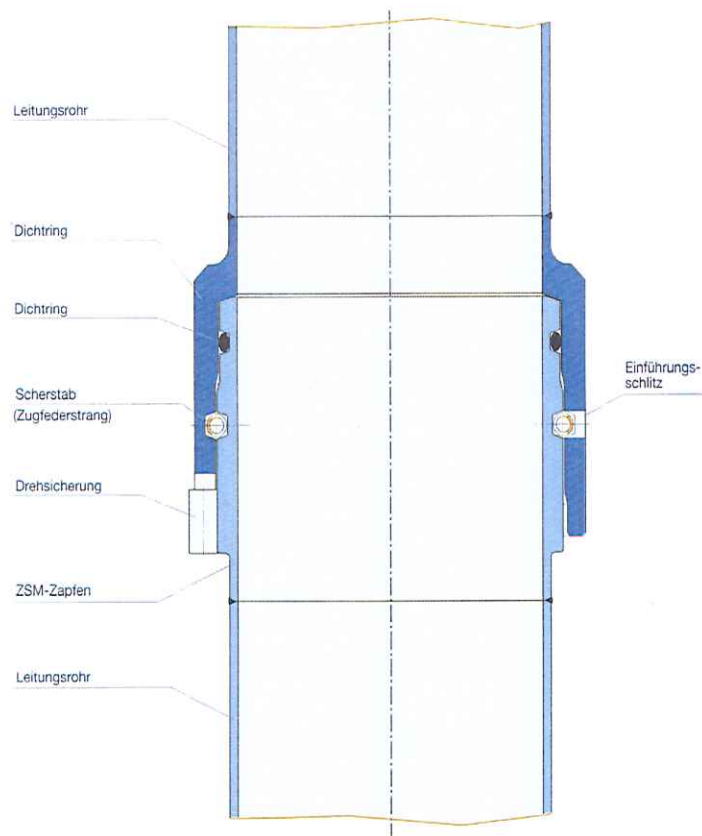

EUFOR INTER

Am Hertogenwald, 7
B-4700 EUPEN

Tél. +(32) 87-63.23.00

Fax +(32) 87-63.23.01

E-mail : info@euforinter.be

Website : www.euforinter.be